

Type 0308F

Fast-Acting Ceramic Tube Fuse



Description

A compact 3mm x 8.4mm fuse provides a space saving alternative to conventional fuse solutions with high interrupting rating for primary and secondary circuit protection up to 250Vac/dc and 250 mA

▲Meets electrical performance specifications for intrinsically safe (EN60079-11) applications

▲Fast-acting, high interrupting rating of 4000 A at 250 Vac/dc

▲Ceramic tube, silver plated brass end cap construction

▲Optional axial leads (tinned copper axial leads construction)



Electrical Characteristics For Series

Rating Current	110% of Ampere Rating	300% of Ampere Rating	1000% of Ampere Rating
40mA~250mA	4Hour, Min	10Sec. Max	0.002Sec. Max

Electrical Characteristic Specifications by Item


Catalog Number	Rated Current	Rated Voltage	Rated Voltage	Breaking Capacity 1	Normal Melting $I^2T(A^2sec)^3$	Normal Cold Resistance(ohms) ²	Color coding	Agency Approval
								cURus
0308F0040	40mA	250VAC	250VDC	4000A	0.00006	14.2	Grey	●
0308F0050	50mA				0.00010	10.5	Red	●
0308F0063	63mA				0.00012	8.65	Pink	●
0308F0080	80mA				0.00018	5.10	Green	●
0308F0100	100mA				0.00087	2.87	Yellow	●
0308F0125	125mA				0.00134	2.20	Orange	●
0308F0160	160mA				0.00166	2.05	Violet	●
0308F0200	200mA				0.00237	1.01	Brown	●
0308F0250	250mA				0.00530	0.71	Black	●

1 AC Interrupting Rating(4000A,PF=0.4),DC Interrupting Rating measured at rated voltage,time constant 4 microseconds,battery source.

2 DC Cold Resistance (Measured at $\leq 10\%$ of rated current).

3 Typical I^2T measured at $10I_n$.

Dimensions unit:mm

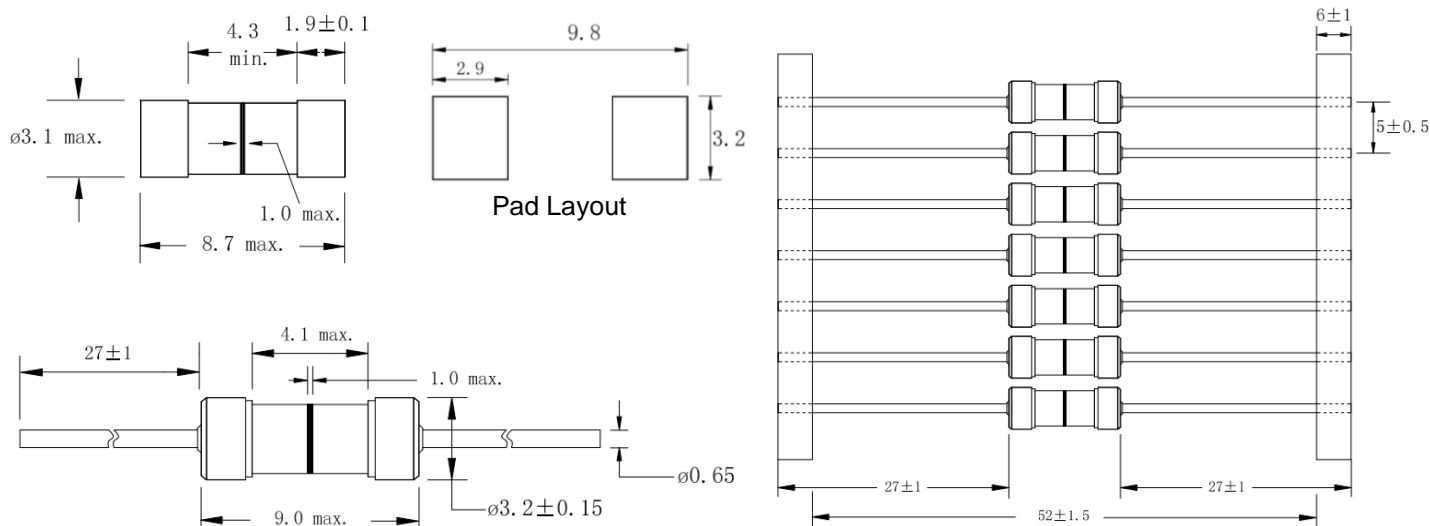

Type 0308F


Fast-Acting Ceramic Tube Fuse




Temperature Re-rating Curve

* Normal ambient temperature: 23+/-3°C

* Operating temperature: -55 ~ 125°C, with proper correction factor applied

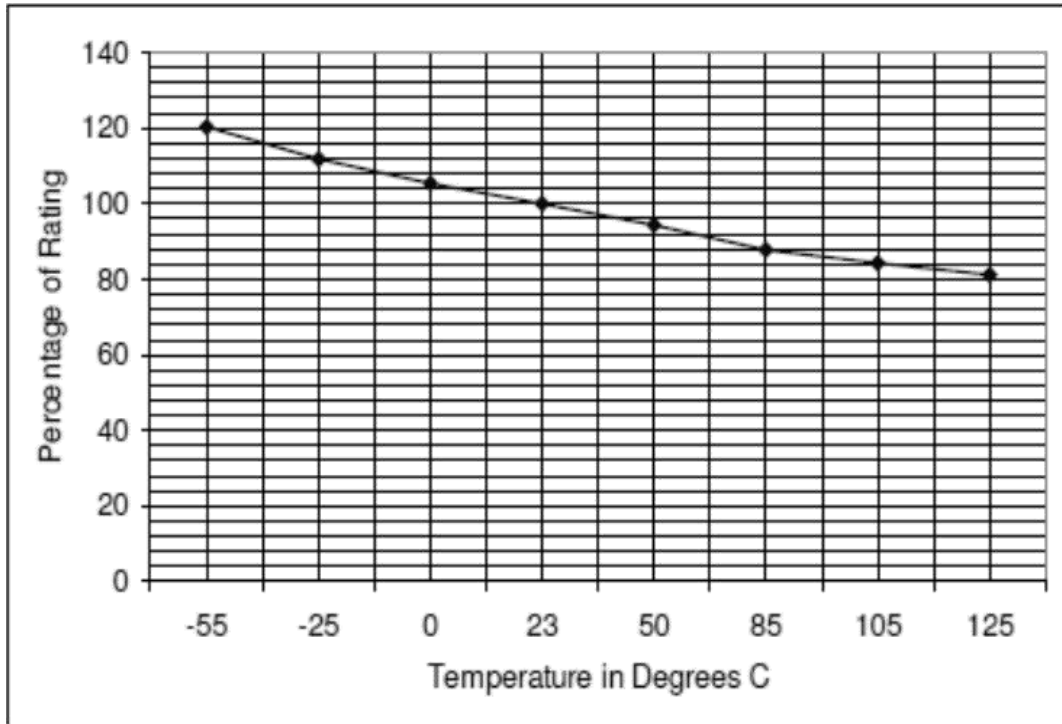

Average Time Current Curves

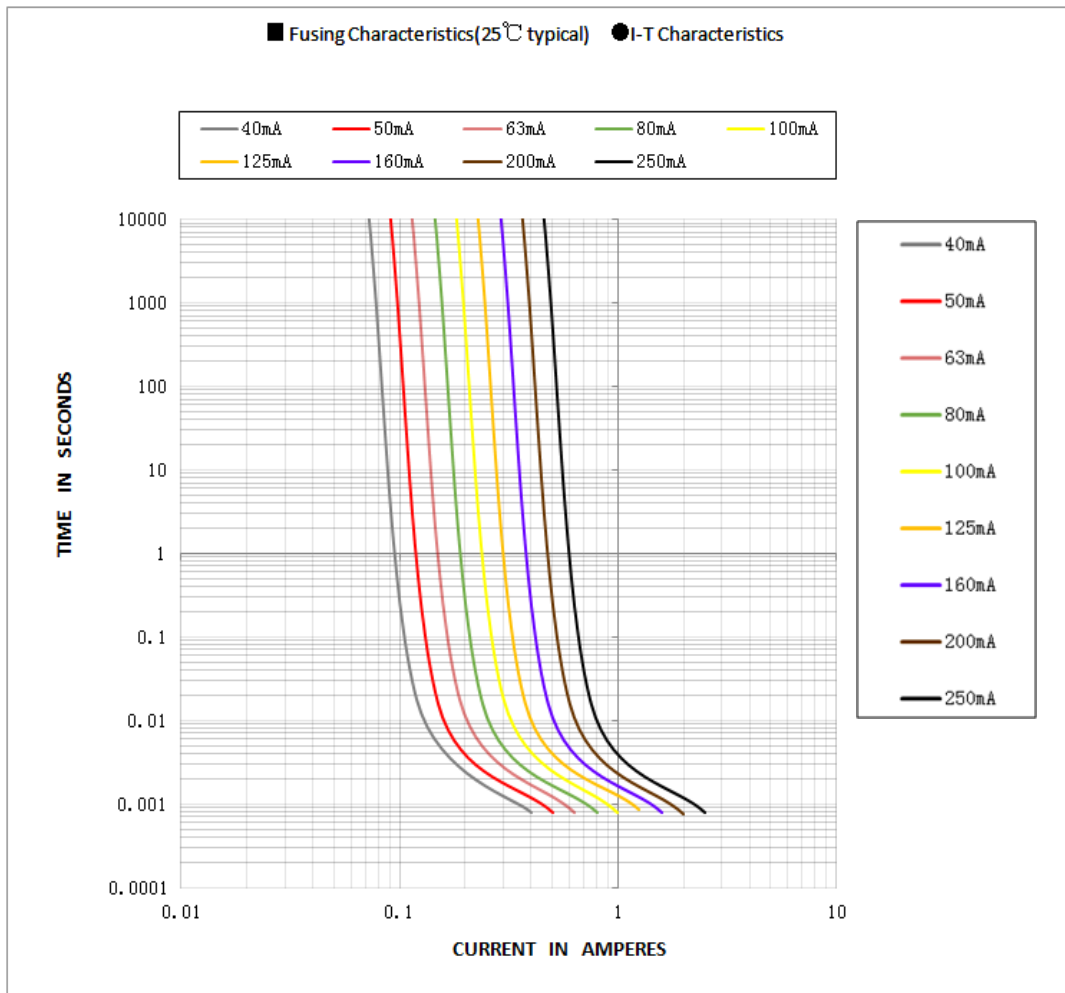


Type 0308F

Fast-Acting Ceramic Tube Fuse

Solder reflow profile

Reflow Condition		Pb-Free assembly
Pre Heat	-Temperature Min($T_{s(min)}$)	150°C
	-Temperature Max($T_{s(max)}$)	200°C
	-Time (Min to Max)(t_s)	60-180 secs
Average ramp up rate (Liquidus Temp(T_L)to peak)		5°C/second max
Ts(max)to T_L Ramp-up rate		5°C/second max
Reflow	-Temperature(T_L)(liquidus)	217°C
	-Temperature(t_L)	60-150 seconds
Time within 5°C of actual peak Temperature(t_p)		20-40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

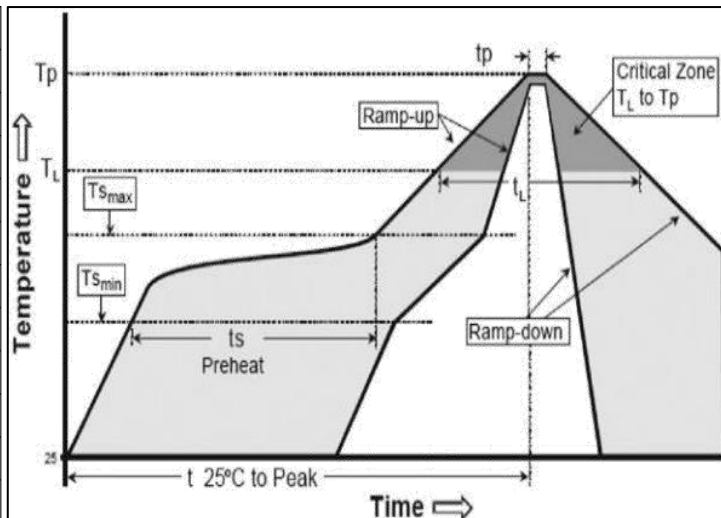

Part Number System

0308F	0050	2	00
Fuse Type	Ampere Rating($10^0 \times 50\text{mA} = 50\text{mA}$)	250V	00: Tape-and-Reel 01: Axial Lead 02: Axial Lead+Apply epoxy resin to the body 03: Axial Lead Tape

Packaging

Packaging Option	Packaging Specification	Quantity
0308F	Tape-and-Reel	500 pcs
	Axial Lead	1500 pcs
	Axial Lead Tape	1500 pcs